
www.rcrflooringproducts.com

RCR Flooring Products Limited Mill Close, Lee Mill Industrial Estate, Ivybridge, Devon, PL21 9GL t: +44 1752 895288 | f: +44 1752 95800 | e: info@rcrflooringproducts.com



ermaban Wave



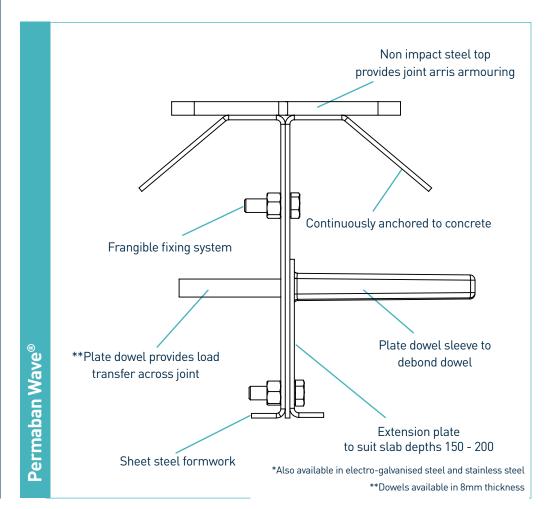

Specification Sheet Issue 2.2 01/03/2021

RCR Flooring Products All content found within this datasheet is approximate. RCR Flooring Products Ltd reserves the right to amend this datasheet at any time. For further details, please contact RCR Flooring Products Ltd. RCR Flooring Products Ltd is registered in England & Wales - No. 02815314.


www.rcrflooringproducts.com RCR Flooring Products Limited Mill Close, Lee Mill Industrial Estate, Ivybridge, Devon, PL21 9GL t: +44 1752 895288 | f: +44 1752 95800 | e: info@rcrflooringproducts.com



Specification Sheet Issue 2.2

01/03/2021

Permaban Wave®

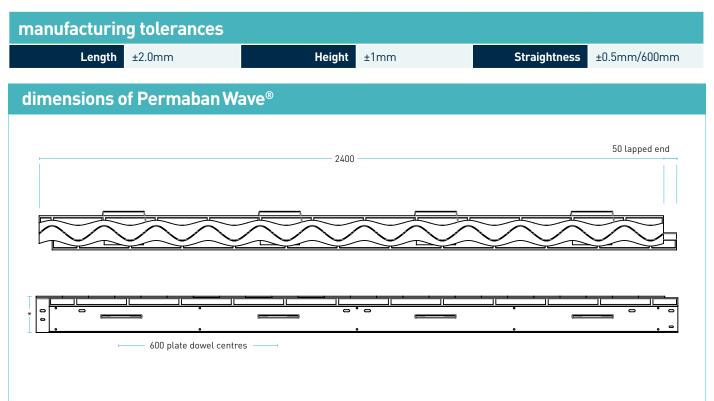

* dimensions in mm

dimensions and weight of Permaban Wave®									
Nominal Slab Depth (mm)	Joint Height, h (mm)	Dowel Size (mm)	Dowel Centres (mm)	Length (mm)	Single Joint Weight (kg)	Number Per Bundle	Bundle Weight (kg)		
150 - 200	140 - 180	151 x 120 x 8	600	2400	26.0	55	1495.0		
225	200				30.0	44	1380.0		
250	225				32.0	44	1468.0		
300	275				35.0	33	1155.0		
320	300				37.0	33	1281.0		

Typical height and length values shown only. Weight values shown are based on Permaban Wave® including TD8 dowels and are approximate.

materials						
Component	Material					
Non impact steel top provides joint arris	S275JR / BS EN 10088-2 1.4301 304L					
Sheet steel formwork	BS EN 1030:2006 DC01					
Plate dowel	BS EN 10025-2:2004 S275JRG2					
Plate dowel sleeve	HDPP					







All content found within this datasheet is approximate. RCR Flooring Products Ltd reserves the right to amend this datasheet at any time. For further details, please contact RCR Flooring Products Ltd. RCR Flooring Products Ltd is registered in England & Wales - No. 02815314.



Permaban Wave®

Specification Sheet Issue 2.2 01/03/2021

theoretical calculated ultimate loads at failure of dowel or concrete

(For typical slabs, 40N/mm² co	ncrete and 20mm joint opening)	Unreinforced Slab		
Slab Depth (mm)	Dowel Type	Bursting (kN/m)	Bending (kN/m)	
Extender Plate To Suit 150 - 200	TD8	35.7	87.2	
225	TD8	60.7	87.2	
250	TD8	72.4	87.2	

Ultimate load (kN/m)

This table shows the load at failure in bursting (failure of the concrete) and bending (failure of the dowel) for a joint opening of 20mm - larger joint openings can be accommodated. The ultimate load has been calculated in accordance with TR34 4th Edition. Dowel positions taken at mid depth of slab. For more detailed analysis please contact RCR Flooring Products Ltd.

*All design calculations should be verified by a suitably qualified structual engineer.

